SPECIFICATIONS

GNSS Features	
GPS	L1C/A, L1C, L2C, L2E, L5
GLONASS	L1C/A, L1P, L2C/A, L2P, L3
BDS	B1, B2, B3
GALILEOS	E1, E5A, E5B, E5AltBOC, E6
	(Just for the satellites supporting L5)
IRNSS	L5
	L1C/A, L1 SAIF, L2C, L5, LEX
	Trimble RTX ^[1]
	>99.99%
initialization reliability	
Positioning Precision	
Code differential GNSS positionia	ng Horizontal: 0.25 m + 1 ppm RMS
	V (1 1 0 50 1 4 DMO
GNSS static	Vertical: 0.50 m + 1 ppm RMS Horizontal: 2.5 mm + 0.5 ppm RMS
	Vertical: 5 mm + 0.5 nnm RMS
Real-time kinematic	Horizontal: 8 mm + 1 ppm RMS
(Baseline<30km)	Vertical: 15 mm + 1 ppm RMS
SLink (RTX) ^[2] H	Vertical: 15 mm + 1 ppm RMS lorizontal: 4-10 cm Vertical: 8-20 cm
RTK XTRa (xFill)[3]	Horizontal: 5 + 10 mm/min RMS
	Vertical: 5 + 20 mm/min RMS
SBAS positioning	Typically<5m 3DRMS
RTK initialization time	2~8s
IMU tilt compensation Ad	Iditional horizontal pole tip uncertainty s than 8mm + 0.6 mm/° tilt down to 30°
invio uit angle	0 -00
Hardware Performance	
	15.3cm(φ)×10.6cm(H)
	1.2kg (battery included)
Material	Magnesium aluminum alloy shell
Operating temperature	25℃~+65℃
Storage temperature	35℃~+80℃
Humidity	100% Non-condensing
Waterproof/Dustproof	IP68 standard, protected from long
	time immersion to depth of 1m
	IP68 standard, fully protected against
	IP68 standard, fully protected against
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally 2W
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally 2W 6-28V DC, overvoltage protection
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally
Shock/Vibration	IP68 standard, fully protected against blowing dustWithstand 2 meters pole drop onto the cement ground naturally

WIFI	
Modem	
WIFI hotspot	Receiver broadcasts its hotspot form web UI
	accessing with any mobile terminals
WIFI datalink	Receiver can transmit and receive correction
	data stream via WiFi datalink

Data Storage/Transmi	ssion
Storage	64GB SSD internal storage
_	Automatic cycle storage (The earliest data
	files will be removed automatically while the

files will be removed automatically while the memory is not enough)
Support external USB storage
The customizable sample interval is up to 50Hz
Data Transmission...... Plug and play mode of USB data transmission
Supports FTP/HTTP data download
Data Format....... Differential data format: CMR+, CMRx, RTCM 2.1,
RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2
GPS output data format: NMEA 0183, PJK plane
coordinate, Binary code, Trimble GSOF
Network model support: VRS, FKP, MAC,

Sensors	Sen
Electronic BubbleController software can display electronic	Elec
bubble, checking leveling status of the	
carbon pole in real-time	
MU Built-in IMU module, calibration-free	IMU.
and immue to magnetic interference	
ThermometerBuilt-in thermometer sensor, adopting intelligent	Ther
temperature control technology, monitoring	
and adjusting the receiver temperature	

fully support NTRIP protocol

User Interaction Operating system	Linux
	2-button and visual operation interface
Indicators	2 LED indicators, data interaction indicator and Bluetooth indicator
LCD	1.54-inch HD color LCD touch screen
	with resolution 240*240
Web interaction	With the access of the internal web interface
	management via WiFi or USB connection, users
	are able to monitor the receiver status and
	change the configurations freely
Voice guidance	The intelligent voice technology provides status
	and operation voice guidance, supports
	Chinese/English/Korean/Spanish
	/Portuguese/Russian/Turkish
Secondary developme	ent Provides secondary development
	package, and opens the OpenSIC observation
	data format and interaction interface definition
Cloud service	The powerful cloud platform provides online
	services like remote manage, firmware update,

[1] It requires a subscription to data service.

[2] RTK XTRa also requires a subscription to the data service, and precision is dependent on GNSS satellite availability. RTK XTRa positioning ends after 5 minutes of radio downtime.

Remarks: Measurement accuracy and operation range might vary due to atmospheric conditions, signal multipath, obstructions, observation time, temperature, signal geometry and number of tracked satellites. Specifications subject to change without prior notice

CEFC MINTE

online register and etc



SOUTH SURVEYING & MAPPING TECHNOLOGY CO., LTD.

Add: South Geo-information Industrial Park, No.39 Si Cheng Rd, Guangzhou, China Tel: +86-20-23380888 Fax: +86-20-23380800


E-mail: mail@southsurvey.com export@southsurvey.com impexp@southsurvey.com euoffice@southsurvey.com http://www.southinstrument.com http://www.southsurvey.com



INNO7

- Smart interactive RTK receiver -



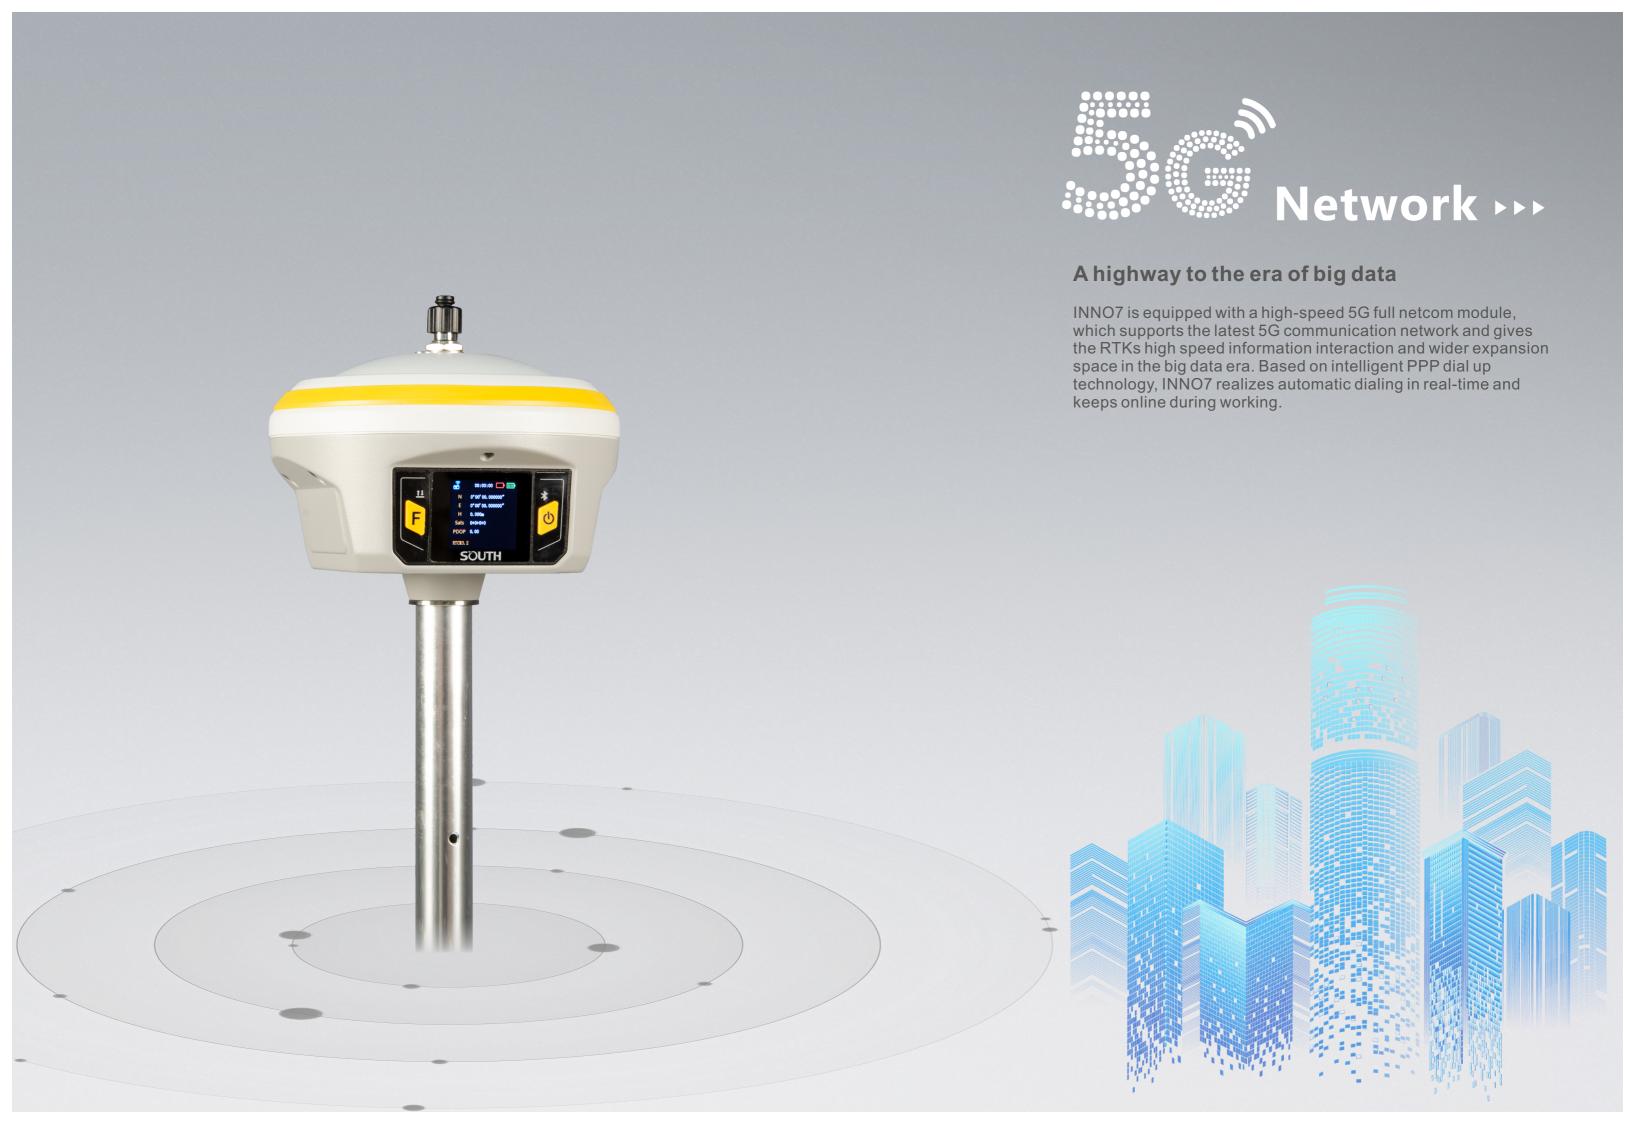


FarLink Protocol >>>

INNO7 adopts an internal radio with 3W maximum transmission power to achieve the typical working range as 15km through "**Far-link**" protocol.

The transmission bandwidth becomes large, which perfectly solves the problem of large data volume of multiple constellations transmission. And the power consumption can reduce about 60% in the same amount of data transmission compare to the traditional RTK.




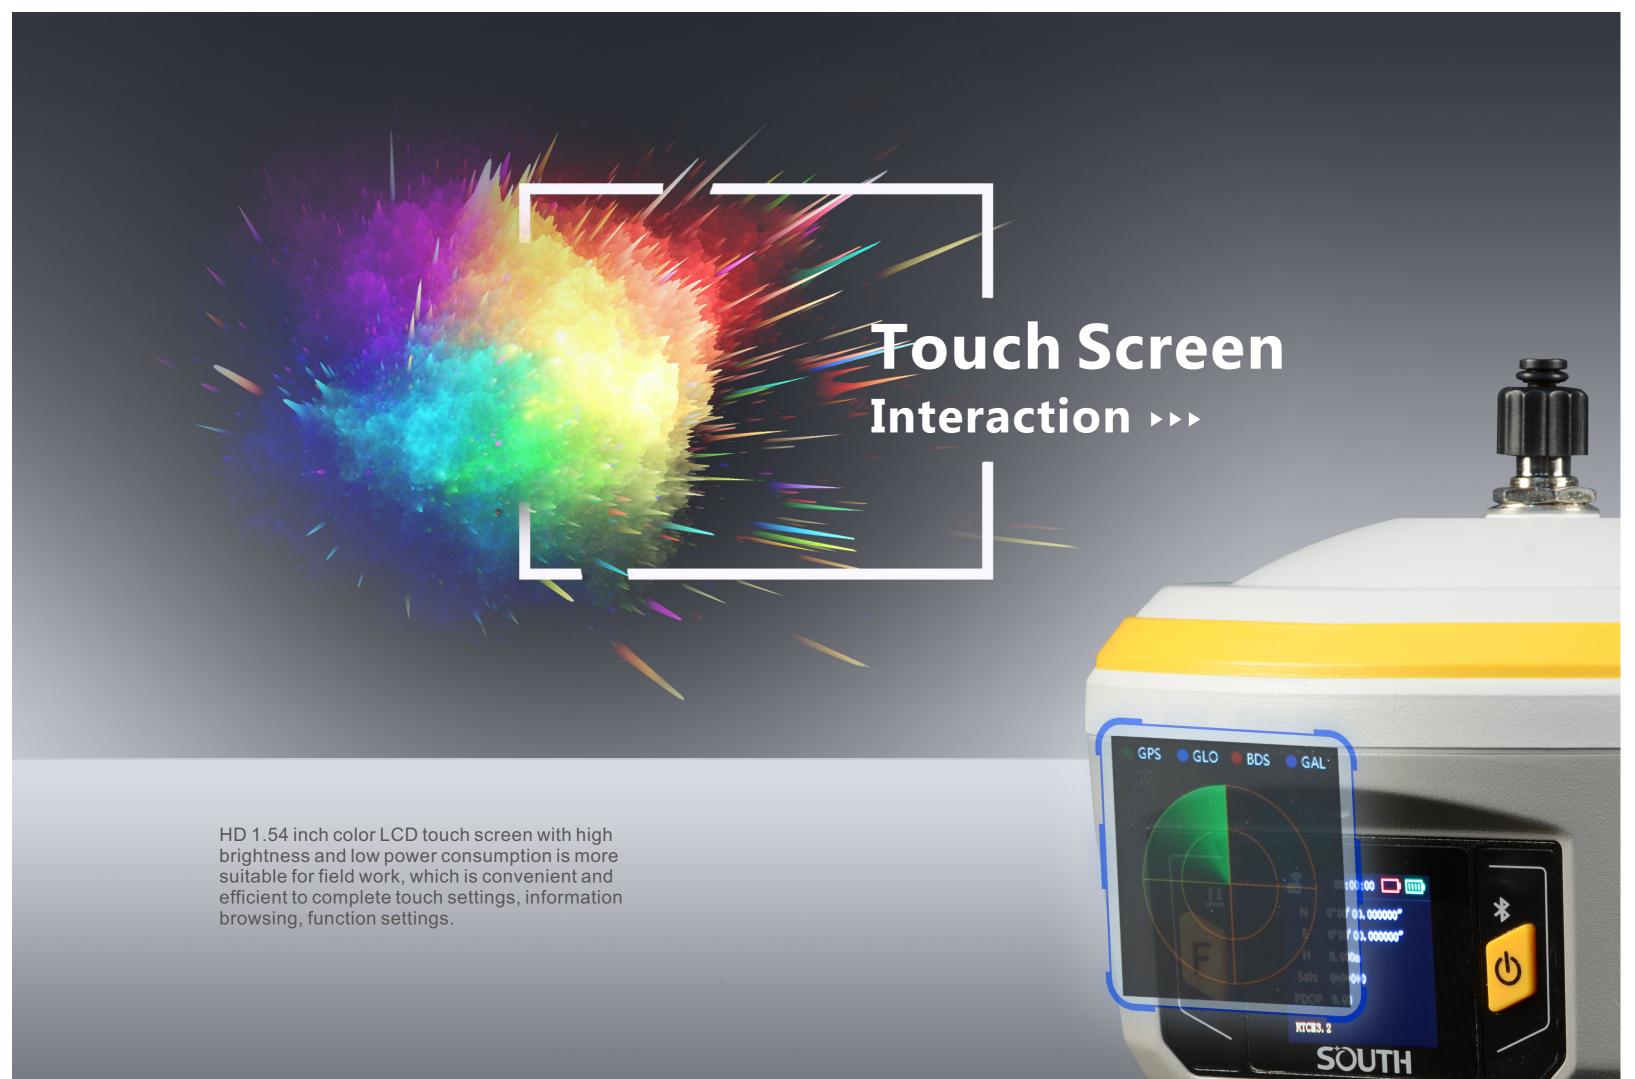

Slink & RTK XTRa ▶▶▶

Base on the RTX global services, INNO7 is able to achieve the goal of precise single-point positioning without a reference, the positioning is no more constrained by terrain environment, such as mountain, wasteland, desert, island, fixed solution is generally available as long as the GNSS constellations are visible.

Moreover, RTK XTRa technology which is derived from RTX services, it can extend RTK positioning for several minutes while the RTK primary source of correction stream is interrupted or not available, it really makes RTK bright anywhere.

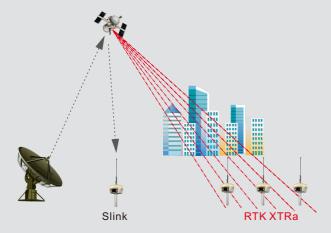

64GB SSD ▶▶▶


Built-in 64GB solid-state storage, which can meet most needs of measurement works. And the feature of cyclic storage helps receiver to automatically remove the previous files while there is not enough space in the memory, with this excellent performance, data storage can last almost 4 years based on 5s sampling interval. And the design of embedded memory chip can ensure the safety of measurement data.



The 'Fast' IMU ▶▶▶

INNO7 is integrated with a new generation IMU module that it only needs 2-5s of shaking receiver to complete the initialization, and the maximum tilt compensation angle can be 60 degree. it can ignore magnetic interference while RTK receiver works in such a magnetic environment. This professional IMU module can keep the tilt effect for about 40s if RTK receiver stays on a point without moving.

IMU is an electronic unit which records angular velocity and linear acceleration data which is fed into a central processing unit for data interpreting and logging. When the RTK receiver moves, and then it will record the data and send back to the receiver for calculating to output the corrected result of position.



RTK² ▶▶▶

Innovative "dual RTK engine algorithm technology" to achieve secondary coordinate check and calculation, effectively avoiding the problem of fake coordinates, more reliable coordinate accuracy and higher stability.

